

3 Main Features

| | | |
|-------------------------------|--|---------------|
| Standards | IEEE802.3, IEEE802.3i, IEEE802.3u, IEEE802.3x, IEEE802.3az | |
| Network Media (Cable) | 10BASE-T: UTP category 3,4,5 cable 100BASE-Tx: UTP category 5, 5e cable | |
| Number of Ports | 5 x 10/100Mbps Auto-Negotiation ports | |
| Transfer Method | Store-and-Forward | |
| MAC Address Table | 1K | |
| Switching Capacity | 1Gbps | |
| Packet Forwarding Rate | 744Kpps | |
| Indicators | Per Device | Power |
| | Per Port | Link/Activity |
| Power Supply | DC: 5V,0.5A External Power | |
| Power Consumption | Maximum: 1.3W | |
| Dimensions | 88.2*52.7*21.8 mm (L x W x H) | |
| Environment | Operating Temperature: 0°C-45°C | |
| | Working Humidity: 10%-90%(non-condensing) | |
| | Storage Temperature: -40°C-70°C | |
| | Storage Humidity: 5%-90%(non-condensing) | |

CE Mark Warning

This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

EU declaration of conformity

Cudy hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC and 2011/65/EU. The original EU declaration of conformity may be found at <http://www.cudy.com/en/ce>

For support and warranty, please visit: <http://www.cudy.com/>. Specifications are subject to change without notice. Cudy is a registered trademark of Shenzhen Cudy Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright©2022 Shenzhen Cudy Technology Co., Ltd. All rights reserved.



Quick Installation Guide

5-Port 10/100Mbps Desktop Switch

Model: FS105D




Email:
support@cudy.com



Website:
www.cudy.com

1 Physical Connection

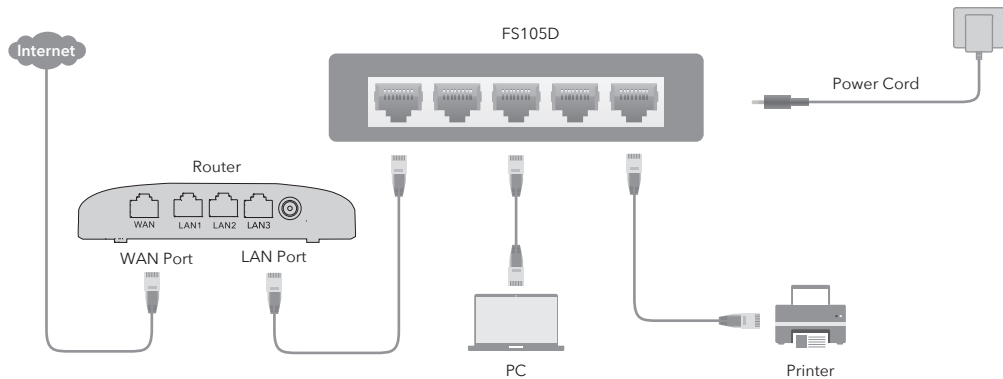

2 LED Indication



| | |
|-------------------|--|
| Power | On: Power on Off: Power off |
| Link / Act | On: Link but no activity Flashing: Transmitting/receiving data Off: No link |